

(19) World Intellectual Property  
Organization  
International Bureau



28 FEB 2005

(43) International Publication Date  
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number  
**WO 2004/018733 A2**

- (51) International Patent Classification<sup>7</sup>: **C25B** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/NO2003/000296
- (22) International Filing Date: 26 August 2003 (26.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20024054 26 August 2002 (26.08.2002) NO
- (71) Applicant (*for all designated States except US*): **ORO AS** [NO/NO]; Postboks 23, Kristianborg, N-5822 Bergen (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **BELT, Jarle** [—/NO]; Sagvågsveien 233, N-5410 Sagvåg (NO).
- (74) Agent: **AS BERGEN PATENTKONTOR**; P.O. Box 1998, Nordnes, N-5817 Bergen (NO).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: STRUCTURE OF AN ELECTRODE FOR USE IN AN ELECTROLYTIC CELL

(57) **Abstract:** There is disclosed a structure of an electrode for use as an anode and/or a cathode in an electrolytic cell. The electrode structure is characterised by a conductive frame (10) having a number of liquid through flow openings (18) and including means (20) for connection to current a supply, in that one or both plane sides of the frame is covered with a conductive perforated foil or a wire mesh, and the wire mesh includes spacer means (18) being adapted to cover the surface structure of the frame (10). A method for preparing said electrode and use of the anode and cathode are also disclosed.

WO 2004/018733 A2

5

10

STRUCTURE OF AN ELECTRODE FOR  
USE IN AN ELECTROLYTIC CELL.

15 The present invention relates to a structure of an  
electrode for use as an anode/cathode in an electrolytic  
cell as stated in the preamble of the following patent  
claim 1.

20 Further the invention relates to a method for preparing  
said electrode structure.

The invention also relates to a use of the electrolytic  
cell including anode and cathode as mentioned above.

25 The invention relates to the technology concerning the  
production of oxidants and radicals which are used to  
oxidising and eliminating organic material in liquids, and  
organic materials on particles in liquids, and for  
destruction of bacteria, spores, micro organisms, algae and  
30 virus.

Known methods in use today

Today anodes (electrodes) are produced by the use of elec-  
trolytic coating a substrate with thin layers of precious  
35 (noble) metals. However these electrodes have a particu-

larly short lifetime and they do not tolerate being exposed to high voltages over time. If they are exposed to high voltages they will burn. During the process a dissolving/-precipitation occurs from the anode so that it is corroded.

5

There is also a production of anodes of pure metals or alloys of such metals, and which do not belong to the precious metal group, but these are quickly corroded in use, they do not produce the desired oxidant, nor can they  
10 be exposed to the desired voltage.

Another lesser-known method in use today involves that tantalum, iridium, or a mixture of these are rolled down to between 0,015 and 0,035 mm and is welded to a core for an  
15 anode which is made of titanium, aluminium or copper. By this method a frictional welding is used. The lifetime for these electrodes is longer than of the electrodes that are made by use of electrolysis. They tolerate substantially higher voltage and current. With these advantages in  
20 variables for electrolyses process, i.e. voltages from 0-380V and currents from 0-1000 Amperes, a mixture of oxidants is produced including a very high reactivity, power and possibility for functional balancing of the single oxidants ( $\text{Cl}_2$ ,  $\text{ClO}_3^-$ ,  $\text{O}_3$ ,  $\text{O}_2$ ,  $\text{H}_2\text{O}_2$ ,  $\text{OH}$ ,  $\text{ClOH}$ ,  $\text{O}$ ),  
25 exceeding the effect of, and reduces the undesirable effect of oxidants from anodes produced by other methods.

The limitations for the preparation by these methods are the variation span in the mixture of alloys. For example it  
30 is known that platinum/iridium-alloys (Pt/Ir) including more than 20% iridium is difficult to roll down to the desired thickness. Today it is known that the alloy can be rolled down to 33 micron (0,033mm). Higher concentrations of Ir leads to even greater problems, and the prepared foil  
35 often becomes brittle. It is also desirable that the foil

have a high degree of hardness in order to increase the mechanical resistance to wear and tear. Further the thickness of the foil is decisive in determining how much of certain oxidants is produced in a certain liquid with a given voltage and current. It is further known that for example pure platinum technically may only be rolled down to 15 micron (0.015mm). Below this thickness it is not possible to obtain a dense foil (without pores).

- 10 Recently methods for vacuum/plasma spraying of tantalum and precious metals according to the abovementioned method have extended the potential of use in that methods for spraying of thinner layers have been developed, and at the same time increased the variation span of the mixture of an alloy with 100% pore density, and thus the specific area of use has been extended.

The known electrolytic processes in its simplest form provide  $\text{Cl}_2$  as an oxidation agent. Further oxidants ( $\text{ClO}_3^-$ ,  $\text{O}_3$ ,  $\text{O}_2$ ,  $\text{H}_2\text{O}_2$ ,  $\text{OH}$ ,  $\text{ClOH}$ ,  $\text{O}$ ) are however far more chemically reactive, and are provided by coating a substrate with precious metals where a voltage is exposed in a range where the law of Faraday is exceeded.

- 25 Of these components the radicals are in particular the most powerful oxidation agents, both with regard to power and non-desirable side-effects (halogenated compounds of organic material). The problem of the known electrolytic processes is that the radicals cannot be utilised since they have a lifetime of a thousandth of a second and are therefore only present very close to the surface of the anode. As only a very small part of the liquid amount that is conducted through an electrolytic cell makes contact with this anodic surface, large amounts of liquids cannot effectively be exposed to radical exposure for reaction

with organic compounds, bacteria, virus etc, which is desired to be eliminated from the liquid.

Known electrolytic processes form hydrogen at the cathode. Hydrogen lowers considerably the formation of oxidants by the anode since the hydrogen forms water when it comes in contact with the oxidant. This applies in particular to OH-radicals in contact with hydrogen. The hydrogen gas also reduces the conductivity of the liquid when it is present in the voltage field between the anode and cathode, and in contact with the anode.

It is known from US patent 6,328,875 that electrolytic cell designs have been developed with anodes /cathodes made of conductive porous elements consisting of metal, including noble metals, or carbon from welded or woven wire cloth, expanded metal or carbon felt, carbon woven cloth or reticulated vitreous carbon and metallic foam. The structure includes an open solution where the effluent is passed in-between a spacer/anode and cathode to open area (open solution). The stack is clamped together and anode/cathode are separated, mono polar or bipolar, by spacer to prevent shortcut. The effluent is then passed in parallel with the anode/cathode/spacer in the process.

Furthermore it is known that US patent 6,342,151 comprises anodes/cathodes made of permeable conductive material selected from the group consisting of perforated plates, screens, wool, felt and weave made of stainless steel, aluminium, copper, platinized titanium, mixed metal oxides, gold and gold plated steel. Also this electrode use spacers to prevent shortcut between anode and cathode when distance between said components are small.

It is well known that spacers increases current consumption in an electrolytic process and reduces flow capacity through the electrode.

5 It is also well known that fouling due to scaling caused by Mg and Ca content in the effluent treated is a substantial problem with respect to electrolysis. The scaling problem occurs when velocity of Mg and Ca contained effluent (such as sea water) is passed through an anode/cathode reaction.  
10 If the velocity of the effluent is too slow, a bridge of crystals will accelerating be built between anode and cathode causing fouling of the process. Increasing the velocity in such extent might prevent this in such extent that all Mg and Ca build up are transported away before it  
15 attaches to the cathode. Another way, provided that anode and cathode are of same or equal reactive material, is to alternate the polarity of the anode and the cathode regularly. Then scaling burst off the cathode as it is reverted to anode.

20

It is an object of invention to provide a new and improved construction of the electrode that eliminates energy losses due to need of spacer and still allows close distance between anode and cathode without risk of shortcut.

25

It is an object of the invention to allow large flow vertical through the electrode while maintaining full effectiveness of the electrolysis in order to prevent fouling due to scaling.

30

It is an object of the invention to provide a new and improved construction of an electrode to be used to prepare oxidants as mentioned above, for example  $\text{Cl}_2$ ,  $\text{ClO}_3^-$ ,  $\text{O}_3$ ,  $\text{O}_2$ ,  $\text{H}_2\text{O}_2$ ,  $(\text{OH})$ ,  $(\text{ClOH})$ ,  $(\text{O})$ , and which optimally can utilise  
35 the radical production at the surface of the anode.

Further it is an object of invention to provide a new an improved construction of an electrode where a reduced oxidation effect due to hydrogen interference between anode  
5 and cathode, and on the cathode, may be eliminated.

It is further an object of invention to bring substantially all liquid in contact with an area close to the anode where the radicals are produced, and where radicals have a  
10 lifetime of some thousands of second (milliseconds). As the radicals are the predominant oxidation agent, also with regard to non-desirable side effects of further oxidation agents, it is essential for inventiveness, compared with the state of art technology, that the radical effects on  
15 the materials to be disinfected/oxidised, are considerably increased.

It is also an object of the invention to prepare an anode wherein the consumption of energy is considerably reduced  
20 when it is connected to a circuit according to the invention in relation to the volume of liquid to be handled.

It is also an object of invention to provide a new and improved method in which it is possible to simply prepare  
25 an electrode with a higher performance in use than the previously known electrodes.

Further it is an object of the invention to provide a use  
30 of the electrode.

The device, the method and the use according to the invention are characterised by the features appearing in the characteristic clauses of the independent claims.  
35

The further features of the invention are given in the dependent claims, respectively.

According to the present invention a method is provided which is suitable in using wire, knitted, woven or plaited wire mesh net of metals for use for, and production of an anode and/or a cathode which may be used to produce a mixture of oxidants, and in particular radicals by use of electrolysis.

The invention is characterised in that an anode is assembled with wires or wire mesh, knitted or plaited of tantalum, niobium, hafnium, zirconium, platinum, rhodium, iridium, ruthenium, palladium, or an alloy thereof, or a mixture of different wires of the abovementioned metal.

The invention is characterised in that the cathode is assembled with wires or a wire mesh, knitted or plaited of 316L steelwires, or higher alloyed conductive and resistant material.

Further the invention is characterised in that the wires or anode meshes and cathode meshes may be joined close together without short circuit contact in that a separation mesh, membrane or coarse crossed squared mesh in a non-conductive oxidant resistant material, which is arranged between the anode and cathode in order to separate these to prevent a short circuit contact.

According to a preferred embodiment of the invention, a superior conductive material may be arranged on the anode and cathode, individually or in a coarse square pattern, and may be thereafter insulated by means of oxidant durable insulating material from electrolyte in order to provide an



even current through flow over the exposed wire mesh or wire net area.

5 The invention is characterised in that anode/cathode is arranged in a flow of liquid which has to pass through the anode/cathode, or that the anode/cathode is arranged in a vessel for production of oxidant.

10 Further, the invention is characterised in that by electrolysing of freshwater one is able to use both cathode mesh and anode mesh in SS316L quality or higher alloyed metal.

15 Further, the invention is characterised in that by electrolysis of freshwater a woven, knitted or plaited mesh may be replaced with a plate in SS316L which is perforated by means of photochemistry in order to substitute a wire mesh.

20 Advantages of the present new method

By exposing electrical current with high current density exceeding the law of Farraday to a wire assembly or a woven, knitted or plaited mesh of the metal or a precious metal as disclosed above, one achieves a high production of  
25 radicals and reactive oxidants. This production implies a particularly high effect by oxidising of organic material and disinfection.

30 The present invention differs from existing electrolytic cells/processes where the effect of radicals, ozone, hydrogen peroxide, chlordioxide, and hypochlorite is prepared from anodes with a layer of precious metals which produces the reactive oxidants, and by providing an electrode structure whereby the production of radicals may  
35 be utilised more optimally than previously.

This may be provided by the anode having a shape including a mesh of metal as disclosed, having a wire distance of from 100 micron to 25000 micron or a square opening of from . . . . .  
5 18 micron to 25000 micron where the metal is exposed to voltages exceeding the law of Farraday resulting in a high production of oxidant close to the anode.

By using the electrode structure according to the invention  
10 the liquid to be handled is brought to pass a wire net mesh where the opening in the wire mesh has an opening size of minimum 15 micron (15  $\mu$ m). On passing the radical reaction with a lifetime of some thousandth of a second, will act substantially on all the liquid flowing through the wire  
15 mesh. Other electrolytic oxidation processes obtain 1-3% radical effect on the surface of the anode. With the present invention one obtains an efficiency of 95-98% utilisation of the radical effect. This is due to the fact that up to 95-98% of the liquid is passing close to the  
20 anode where the radicals spend their lifetime in that the liquid in fact flows through the fine-meshed anode.

The present invention differs from the existing electrolytic cells/processes in that the anode and the  
25 cathode may be conducted very close together by means of a separation element (spacer) or a separation wire mesh, prepared by a coarse squared non-conducting material.

According to a preferred embodiment of the invention, it is  
30 preferred that each frame is covered by two layers of wire mesh, on layer of each plane side of the frame. It is however sufficient that the frame includes only one wire mesh layer, as shown in figure 1A, 1B and 1C.

According to the most preferred embodiment, a wire mesh or parallel threads, 12 and 14, respectively is bounded to each side of the conductor frame 10 by exposing it to a substantial tension force/pressure and possibly by applying heat and using a bonding agent, or by induction welding or laser welding simultaneously with that wire or perforated foil is kept under sufficient tension. Thus the wires or mesh covering the exposed area on each plane side of the conductor are stabilized. Possibly the wire mesh includes parallel threads where each tenth or twentieth thread is of tantalum while the others are platinum threads.

Onto one of wire layers 14 of the frame 10 or said separation wire mesh, a spacer foil 16 (of a PVS or polypropylene material) of a non-conducting material, and having the exact shape (plane view) of the frame 10, is positioned and anchored. Thus the openings 18 of the separation wire mesh 16 are aligned with the through flow openings 18 of the frame 10. Thus the through flow openings 18 of the frame 10 which are "covered" by the wire mesh 12,14 is not covered by said spacer foil 16. The thickness of the frame 10 may be 5 mm, while the spacer foil 16 may have a thickness as low as 0,3 mm (representing the separation between the anode and cathode surfaces). Thus the water/liquid through flow properties of the frame in use, is not obstructed.

Thus an electrode unit, for an anode or cathode, includes said conductive frame having a number of through flow openings 18, both plane sides of which being covered with the perforated plate, the wires (parallel threads or a wire mesh), and the spacer foil 18 on one side only. Further the conductive frame (for a cathode or anode) 10 includes means 20 for connecting to adequate current supply (voltage and current).

In order to construct a single (the simplest) electrolytic cell, two electrode units as shown in figure 4 are mounted mutually close to each other in alignment, so that said  
5 spacer layer 18, provides for the necessary distance (for example of 0,3 mm) between the anode surface 14 of one electrode unit and the cathode surface 12 of the adjacent electrode unit.

10 It is preferred to cover the conductor frame (as being of stainless steel) 10 and the sections of the conductive wire (wire mesh) 12,14 covering said frame, with a non oxidizable material in order to protect against contact with the electrolyte, in a similar manner as shown in  
15 figure 1C.

An electrolytic cell consisting of a number of the abovementioned pairs of electrode units (up to 50 pairs), may have a circular, or rectangular shape. A circular  
20 electrode unit may for example have a diameter of up to 1 meter, representing the water through flow of the unit. The electrolytic cell may be placed into a pipe conducting the water to be treated according to the invention, for example as shown in figure 5. When applying a sufficient voltage to  
25 the anode/cathode sets, the process water flowing through the unit (the openings 18) of the wire mesh of the unit, obtains a close reactive contact with the oxidants and radicals formed on the anode threads of the wire mesh.

30 The drawing figures 4A and 4B are expanded views (rectangular and circular versions) of the four layers 20, 12, 14, 16 of which each unit is structured.

Fig. 4B shows the anode or cathode wire mesh where the  
35 conductor frame of a superior rigid conductive material is

supporting the exposed anode or cathode surface in order to obtain an even current distribution over a large area or in case of high current. The mesh is attached to the conductor frame at both sides. The non-conductive spacing material in the same shape as the rigid conductor frame and attached to one of the meshes at one side.

The assembly of a single anode or cathode can be stacked in numbers from one anode and one cathode up to 50 altogether.

Anode and cathode might be of identical material or different. In case of similar material DC power applied might be alternated to avoid scaling and uneven tear and wear. Anode size might each be more than 1 m diameter. Flow capacity might be from a few litres /hr in the smallest cells to more than 1000 m<sup>3</sup>/hr in each of the largest cell. Typical current density at 316L anodes is 38 mA/cm<sup>2</sup> provided Cl content at 5 ppm. For noble metals the above have been tested to 270 Amp at a anode area of 0,5 cm<sup>2</sup>.

The wire-mesh may be formed of individual wires mounted parallel to one another to the frame, or of individual wires that are woven, knitted or plaited or induction-welded to form the aforementioned mesh. The distance between each parallell

Preferably each individual wire or the perforated foil is attached to the conducting frame by use of such that electrical contact is achieved for even current distribution over exposed electrode area and exposed electrode area becomes tension stabilised to eliminate use of conventional spacer, whereupon frame or conductor is isolated from the liquid electrolyte by an oxidant-resistant isolator/coating.

It is preferred to direct the water to be processed through a mechanical particle extractor in order to remove all particles and organisms larger than the light aperture in the electrode.

5

Further, after the liquid has processed according to the invention it is directed through an hydrophobic adsorption filter or hydrophobic adsorption media in order to remove potential excess organic compounds.

10

After the treatment, the liquid is preferably directed through a flotation device in order to remove electroflotated organic material.

15

The exposed gap between anode and cathode have no need for conventional or further spacers, as spacing is provided by applying a foil, membrane or coarse of non conductive material of the same shape as the frame itself. The clearance might be as low as 0,3 mm. This implies that by the invention, it is possible to obtain a high current density with a very low voltage, something which involve that the Law of Farraday easily is exceeded without flow or current loss due to spacer and a desired production of reactive oxidants is provided.

25

Another advantage by applying wire/mesh or perforated foil at both sides of the conductor frame is that it allows mm<sup>2</sup> upscaling for extreme currents passing to the exposed area for electrolysis. A 5mm thick frame covered at both sides allows placement of a thin spacing frame at both sides where the cathode mesh/perforated foil can be placed close to the anode in a distance down to 0,3 mm. With varying distances more than 3000 Amps can be passed through an electrode.

35

The present invention differs from existing electrolytic cells/processes in that one by means of a very low voltage, may obtain the necessary high current density of large area without this reducing the volume through flow of the liquid to be handled. This also implies that large volumes of liquid to be handled may be treated very cheaply. The volume capacity of the electrolytic cell is not changed in contrast to other electrolytic cells even though the distance between the anode and cathode is reduced from i.e. 5 cm to 0,3 mm in that the same volume-liquid flow goes through the anode and cathode independent of the mutual distance between them.

The present invention differs from the existing anodes in that the use of wires to a considerable degree increases the area of the anode compared to the weight of the metal and the real surface. Thus, the costs of the precious metals are also reduced considerably at the same time as the efficiency per  $\text{cm}^2$ , is increased.

The present invention differs from existing electrolytic cells/processes in that it is possible to obtain high current density, a low consumption of energy and a high through flow by volume of liquid, as the distance between the anode and cathode can be reduced to 0,3 mm without this reducing the capacity of the electrolytic cell, so that it may be used with the iron conductivity in fresh water (surface water and ground water).

With the present invention it is possible to combine the effect of different metals. For example, an anode mesh of tantalum including some wires of another precious metal from the platinum group, produces mainly ozone, radicals and hydrogen peroxide, and very little hypo chlorite and chloride dioxide. This is due to the fact that all flow of

current will take place from the precious metal wires such as tantalum immediately will immediately obtain an isolating layer of oxide.

5 The present invention differs from existing electrolytic cells/processes in that it can be used with a low cost for treating large volumes of liquid, such as surface water, fresh water and ground water with the composition existing in great parts of the world today. Even with both anode and  
10 cathode of 316 L steel or higher alloyed metal without the anode oxidising or corroding. This is due to a high electrode surface with very low consumption of energy is producing the necessary oxidant (ozone and radicals) even with the average conductivity in ground water and surface  
15 fresh water.

The present invention is characterised in that liquid may be conducted through anode and cathode in that a frame of conductive material is fixed to the anode and cathode mesh  
20 with sufficient contact, the mesh is preferably conducted at both sides of the frame, and the conductor frame is coated with a non oxidizable material in order to protect against contact with electrolyte. The spacing material in a non-conductive oxidant resistant material may be provided  
25 whereafter the anode or cathode mesh is assembled. The spacing material is of identical shape as the conductor frame and of varying thickness.

The device according to the invention will be explained  
30 more in detail with reference to the following specification and the following drawings, wherein:

Fig. 1A shows a schematic plan view of an anode 1 of a high conductivity Cu (copper) frame 1 covered with a single wire  
35 mesh of a noble metal.



Fig. 1B shows a cathode frame 3 including a woven, knitted or plaited wire mesh 4 (for example of stainless steel 316L). The superior conductor frame 1 to which the wire mesh is fixed, is isolated with a molded oxidant-resistand isolator.

Figure 1C shows the side section of the oxidant-resistand isolator by reference numeral 5, in addition to the other details of the.

Fig. 2 shows an anode of wires which are fixed to a superior conductor which is isolated.

Fig. 3 shows an anode of a foil which is fixed to a superior conductor which is isolated.

Fig. 4A shows an expanded view of a rectangular electrode structure, and which is disclosed previously in this specification.

Fig. 4B shows an expanded view of a circular electrode structure according to the invention.

Fig. 5 shows a section of an electrolytic cell (with only one set of an anode and cathode shown for simplicity) made of a wire, plaited, woven or knitted mesh with a separation mesh between the anode and cathode in order to prevent a short circuit contact. The liquid is processed in that it is conducted through the anode and cathode so that hydrogen is conducted out from the cathode and away from the anode.

The structure shown in fig. 5 was used in control and verified experiments for treating the ballast water from ships and including sea water containing bacteria, micro

organism, algae and spores. The water including a high degree of pollution, was conducted through the cell once, as shown by arrows, with an amperage of 100 A. The result show that 100% of the abovementioned pollutants, including  
5 spores, were destroyed. An extrapolation of the results based on the experiments show that the required consumption of energy will be 5kWh in order to handle 2500 m<sup>3</sup>/h process water with an anode surface of 2,5 m<sup>2</sup>.

10 Similarly the structure as shown in fig. 5 was used to prove oxidant production in fresh water. With an anode/cathode-distance of 1mm and an anode of a precious metal mesh produced 0,5 ppm ozone during one through flow. Up scaling models show that 2500 m<sup>3</sup>/h require 87 kWh with  
15 an anode surface of 2,5 m<sup>2</sup>.

The experiment was repeated with an anode mesh and cathode mesh of 316 L steel. During one through flow 0,91 ppm ozone was produced in the drinking water with 80 V and 3 A.

20

Fig. 6 shows a section of an electrolytic cell there foil or wire mesh to which a liquid was added to both the plain surfaces whereupon the liquid is conducted through the cathode on each side of the anode so that hydrogen does not  
25 come in contact with the anode or in the field between the anode and cathode.

This electrolytic cell was used for destruction of poly aromatic hydrocarbons (PAH) and PCB on particles in a sea  
30 water slurry. With a careful addition of electrolyte and circulation of the mixture during 20 minutes, the PAH-content was reduced by 99,6% and the PCB-content was reduced by 76% based on relatively high concentrations.

Some further examples of the invention are now presented.

#### EXAMPLE 1

An electrode stack as described in Figure 4B comprising 5 anodes and 6 cathodes all of 316 L steel and a total anode area of 1013 cm<sup>2</sup> were assembled with a 1 mm spacer as described in fig. 4. The liquid flow through the cell was at a rate of 10 l/min. Effluent was untreated drinking water from a surface source with salinity varying between 1,5 and 5 ppm, and with high humic content. E-coli bacteria were added to the water at a concentration of 560.000 bacterias/ml. Passed once through the cell with current 20 Amp showed a total disinfection effectiveness in all samples taken after treatment. That is sample series taken between 2 and 20 minutes after passed through the cell.

The same samples were analysed for trihalomethanes (Chloro-organic and bromoorganic compounds). These samples showed results in the range of 0.9 - 2,5 ppb. This is extremely low compared to chlorination of water. Total count of bacteria was more than 10 log 3 by applying 18,5 Amp.

#### EXAMPLE 2

The same setup and similar water as in EXAMPLE 1 where used but the number of electrodes was multiplied to achieve higher amperage. The scope was to inactivate IPN Virus. Desired 10 log<sub>3</sub> inactivation was achieved at 60 Amp. Furthermore *Aeromonas Salmonicida* was also inactivated with the same log at same conditions. Total restoxidant varied from 0.7 to 1.6 ppm.

#### EXAMPLE 3

Produced water from oil and gas production containing PAH, Hydrocarbons, Phenols and BETEX with significant concentration was passed through 1 noble metal anode of knitted wire cloth and 2 cathodes as shown in fig. 4B. Amperage was 300 Amp and anode area 180 cm<sup>2</sup>. The flow rate was 180 l/min. Phenols were reduced from 1580 microgram/l

to 0.51 microgram /l. PAH 16 was reduced from 34,7 microgram/l to 3,92 microgram/l.

NPD was reduced from 114 microgram/l to 3.92 microgram/l  
TEOM (C10 - C40) was reduced from 16 mg/l to 2,41 mg/l

5 EXAMPLE 4

A contaminated fluid from a oil refinery containing 1600 ppm H<sub>2</sub>S, 2-3 % Phenols and 2900 ppm Ammonium was processed through two noble metal wire mesh anodes stacked with 3 cathodes of 316 L steel mesh. Anode aerea total was 225  
10 cm<sup>2</sup>. Current was 300 Amp. Flow 140 l/min. Cl-content was 2% NaCl. After batch proccesing a volume of 40 l for 15 minutes the H<sub>2</sub>S was oxidized to 0 ppm and further 15 minutes processing resulted in ammonium content of 3 ppm and Phenol content of 300 ppb. During processing pH was  
15 controlled by additives.

EXAMPLE 5

250 g Drill cuttings from oil and gas industry was processed through an electrode under conditions as described in EXAMPLE 4. The cuttings was disperged into 22l  
20 of effluent containing 6 % NaCl. Scope was to remove Hydrocarbons from particles. Initial content of 7,62% total Hydrocarbon vas reduced to 1.32 % in an hour processing.

EXAMPLE 6

Deep blue textile dying wastewater was passed through an  
25 anode of noble metal threads stretched across a 5 inch diameter sircular anode conductor frame so that the area of anode only was 0,5 cm<sup>2</sup> total. The 2 cathodes was wire mesh of 316L steel. 20 l was batch proccesed with flow 180 l/min through the electrode. Volume 20 l. NaCl content 5%.  
30 Current was 270 Amp. In 25 to 35 seconds the waste water became blank.

P A T E N T   C L A I M S

1. Structure of an electrode for use as an anode and/or a cathode in an electrolytic cell, characterised by

5        a conductive frame (10) having a number of liquid through flow openings (18) and including means (20) for connection to current a supply,

         in that one or both plane sides of the frame is covered with a conductive perforated foil or a wire mesh, and

10        the wire mesh includes spacer means (18) being adapted to cover the surface structure of the frame (10).

2. Structure of electrode according to claim 1,

characterised in that        both plane frame sides are covered  
15        with the conductive perforated foil or a wire mesh, and the spacer means is arranged onto said foil or wire mesh net.

3. Structure of electrode according to claim 1,

characterised in that        the spacer means is a foil the  
20        plane section of which corresponding to the plane view of the frame, for not obstructing the through flow properties of the frame, and to prevent electrical contact between the electrodes when used.

25        4. Structure of electrode according to claim 1,

characterised in that        the thicknes of the spacer means foil (16) is about 0,3 mm.

5. Structure of electrode according to claim 1 - 4,

30        characterised in that        the wire mesh includes parallel threads or a wire mesh net, and possibly the wire mesh includes parallel threads where each tenth or twentieth thread is of tantalum while the intermediate threads are of platinum.

6. Structure of electrode according to any of preceding claims, characterised in that the mesh/wires/perforated foil at the anode or cathode or both are anchored sufficient to obtain relevant conductivity between metals by friction welding, laser welding or preferably by use of pressure/heat and bonding agent to preferably both sides or one side of a framework conductor of superior conducting material added sufficient tension to the mesh/wires/perforated foil to obtain stability needed for avoiding shortcut between anode and cathode in use, and where the conductor frame itself is isolated from contact with electrolyte by means of the oxidant-resistant non-conducting material.

7. Structure of electrode according to any of preceding claims, characterised in that each individual wire or the perforated foil is attached to a frame good conducting material by use of pressure, heat and bonding agent, or induction welding or laser welding simultaneously with that wire or perforated foil is kept under sufficient tension such that electrical contact is achieved for even current distribution over exposed electrode area and exposed electrode area becomes tension stabilised to eliminate use of conventional spacer, whereupon frame or conductor is isolated from the liquid electrolyte by an oxidant-resistant isolator/coating.

8. Structure according to any of preceding claims, characterised in that the wires in each electrode when laid individually are from 100 microns to 25000 microns apart, and when they are woven, knitted, induction-welded or plaited into mesh, have an air aperture of from 15 microns to 25000 microns.

9. Structure according to any of preceding claims,  
characterised in that the anode is formed of tantalum,  
niobium, hafnium, zirconium, platinum, rhodium, iridium,  
ruthenium, palladium or an alloy of these, or of an alloy  
5 or an composition of wires of the different aforementioned  
metals, or that anode is made of SS316 L steel or a higher  
alloy metal.

10. Structure according to any of preceding claims,  
characterised in that the anode is formed of a foil and is  
10 designed to be placed in a chamber with a cathode of wire  
or woven, knitted or plaited mesh, into which liquid flow  
can be led on both sides of the foil and out through the  
cathode mesh/cathode wires.

11. Structure according to any of preceding claims,  
characterised in that both anode and cathode consist of  
only plate in SS316L or higher alloy metal which is closely  
perforated by photochemistry.

12. Structure according to any of preceding claims,  
characterised in that the plate thickness is from 25 -  
1000 microns and diameter of perforation from 25-2000  
microns.

13. Structure according to any of preceding claims,  
characterised in that the wires have a diameter of from  
0.010 mm to 5 mm.

14. structure according to any of preceding claims,  
characterised in that anode is a 0.015 mm to 0.300 mm thick  
foil of tantalum, niobium, hafnium, zirconium, platinum,  
rhodium, iridium, ruthenium, palladium or an alloy of these  
in a chamber, where the cathode has a mesh form of wire or  
35 woven, knitted, induction-welded or plaited form, and into

which liquid current can be led on both sides of foil and out through cathode foil/cathode wires.

15. Method of preparing an electrode for use as an anode  
5 and/or a cathode in an electrolytic cell,  
characterised by

providing a conductive frame (10) having a number of liquid through flow openings (18) and including means (20) for connection to current supply,

10 in that one or both plane sides of the frame is covered with a conductive perforated foil or a wire mesh, said foil or wire mesh being fixed to the frame by subjecting the foil or wire mesh sheet to a stretch or tension, and then being forced against and fixed to the frame surface by  
15 means of a welding and/or adhesive operation.

16. Method according to claim 15, characterised in that

a spacer means is arranged onto said foil or wire mesh net said spacer means (18) being a foil the plane section  
20 of which corresponding to the plane view of the frame, for not obstructing the through flow properties of the frame in use.

17. Method according to claims 15-16, characterised in

25 that the spacer foil is a PVC or polypropylene sheet and is welded to the frame/conductive wire mesh.

18. Method according to claims 15-17, characterised in

that applying a spacer means foil (16) of a thickness of  
30 about 0,3 mm.

19. Use of the electrode structure according preceding claims in an electrolytic cell where one single anode electrode and a cathode electrode are stacked and



interconnected in numbers from one anode and up to 50 altogether.

20. Use of electrode structure according to claim 19 in an electrolytic cell processing liquids/water where the anode and cathode is of identical material or different, and in case of similar material, a direct current DC power applied might be alternated to avoid scaling and uneven tear and wear.

21. Use of electrode structure according to claim 19-20, in an electrolytic cell processing liquids/water in that the flow capacity might be from a few litres /hr and up to to more than 1000 m<sup>3</sup>/hr.

22. Use of electrode structure according to claims 19-21 in an electrolytic cell processing liquids/water in that a typical current density at 316L anodes is 38 mA/cm<sup>2</sup> provided a Cl content at 5 ppm, and for noble metals the current is 270 Amp at a anode area of 0,5 cm<sup>2</sup>.

23. Use of anode and cathode according to the preceding claims 19-22, in an electrolytic cell, for production of oxidants through electrolysis, for oxidation of organic material in liquids, and organic material on particles in liquids.

24. Use of anode and cathode according to the preceding claims 19-23, in an electrolytic cell, for production of oxidants through electrolysis, for oxidation and destruction of bacteria, spores, micro-organisms, algae and virus in liquids.

25. Use of anode and cathode according to the preceding claims 19-24, in an electrolytic cell, for production of

oxidants through electrolysis, for treatment of fresh water and drinking water.

26. Use of anode and cathode according to the preceding  
5 claims 19-25, in an electrolytic cell, in which polluted liquid/water is processed through light aperture in anode and/or cathode.

27. Use of anode and cathode according to the preceding  
10 claims 19-26, in an electrolytic cell, for production of oxidants through electrolysis, for destruction of virus, spores and bacteria, and microorganisms, algae and algal cysts smaller than 100 microns in ballast water from ships.

15 28. Use of anode and cathode according to the preceding claims 19-27, where the liquid that is being treated, before it is treated according to the invention, is directed through a mechanical particle extractor in order to remove all particles and organisms larger than light  
20 aperture in the electrode.

29. Use of the anode and cathode according to the preceeding claims 19-28, where the liquid that has been treated, after it is treated according to the invention, is  
25 directed through an hydrophobic adsorption filter or hydrophobic adsorption media in order to remove potential excess organic compounds.

30. Use of the anode and cathode according to the  
30 preceeding claims 19-29, where the liquid while treated is directed through a flotation device in order to remove electro flotated organic material.

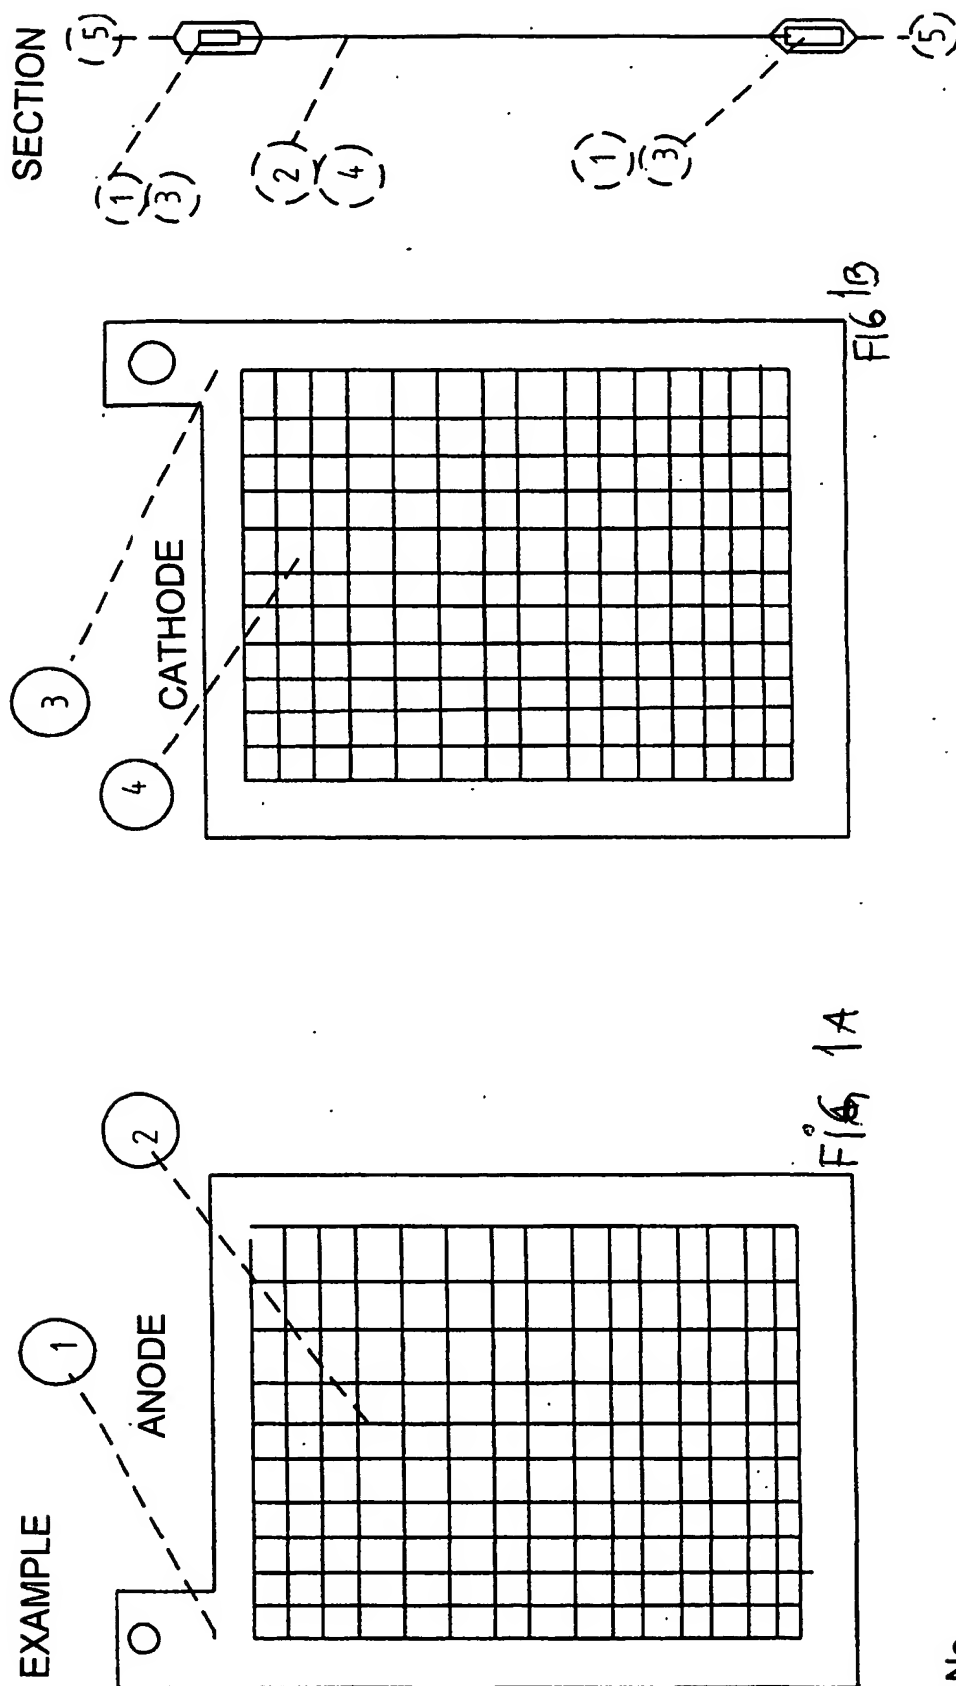


FIG 1

POS No. :

1. Conductor of a material with high conductivity Cu.
2. Wire mesh of noble metal
3. Conductor of a material with high conductivity 316 L
4. Cathode mesh of SS 316L
5. Molded oxidant-resistant isolator

EXAMPLE 2

ANODE


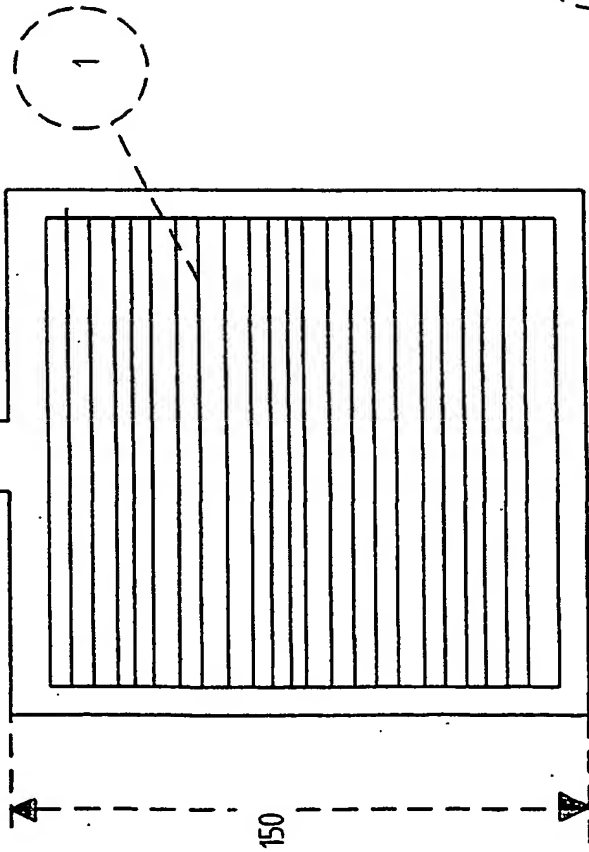


FIG 2

1. Wires of noble metal
2. Superior conductor Cu
3. Foil of noble metal
4. Oxidant-resistant isolator

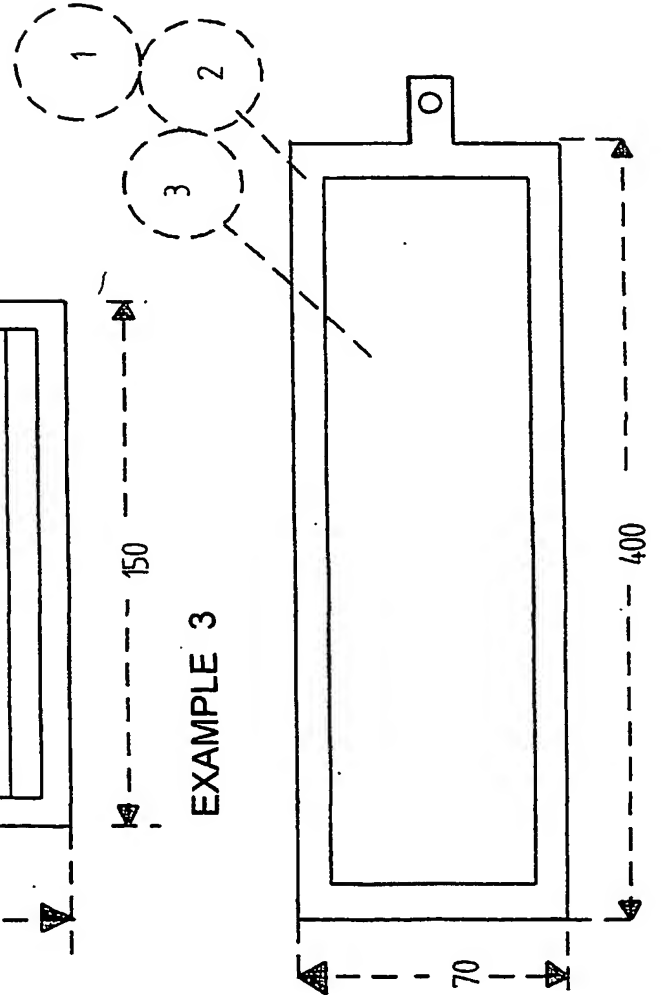

EXAMPLE 3

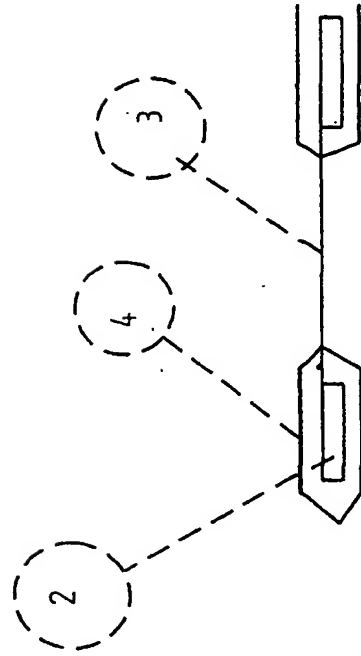


FIG 3

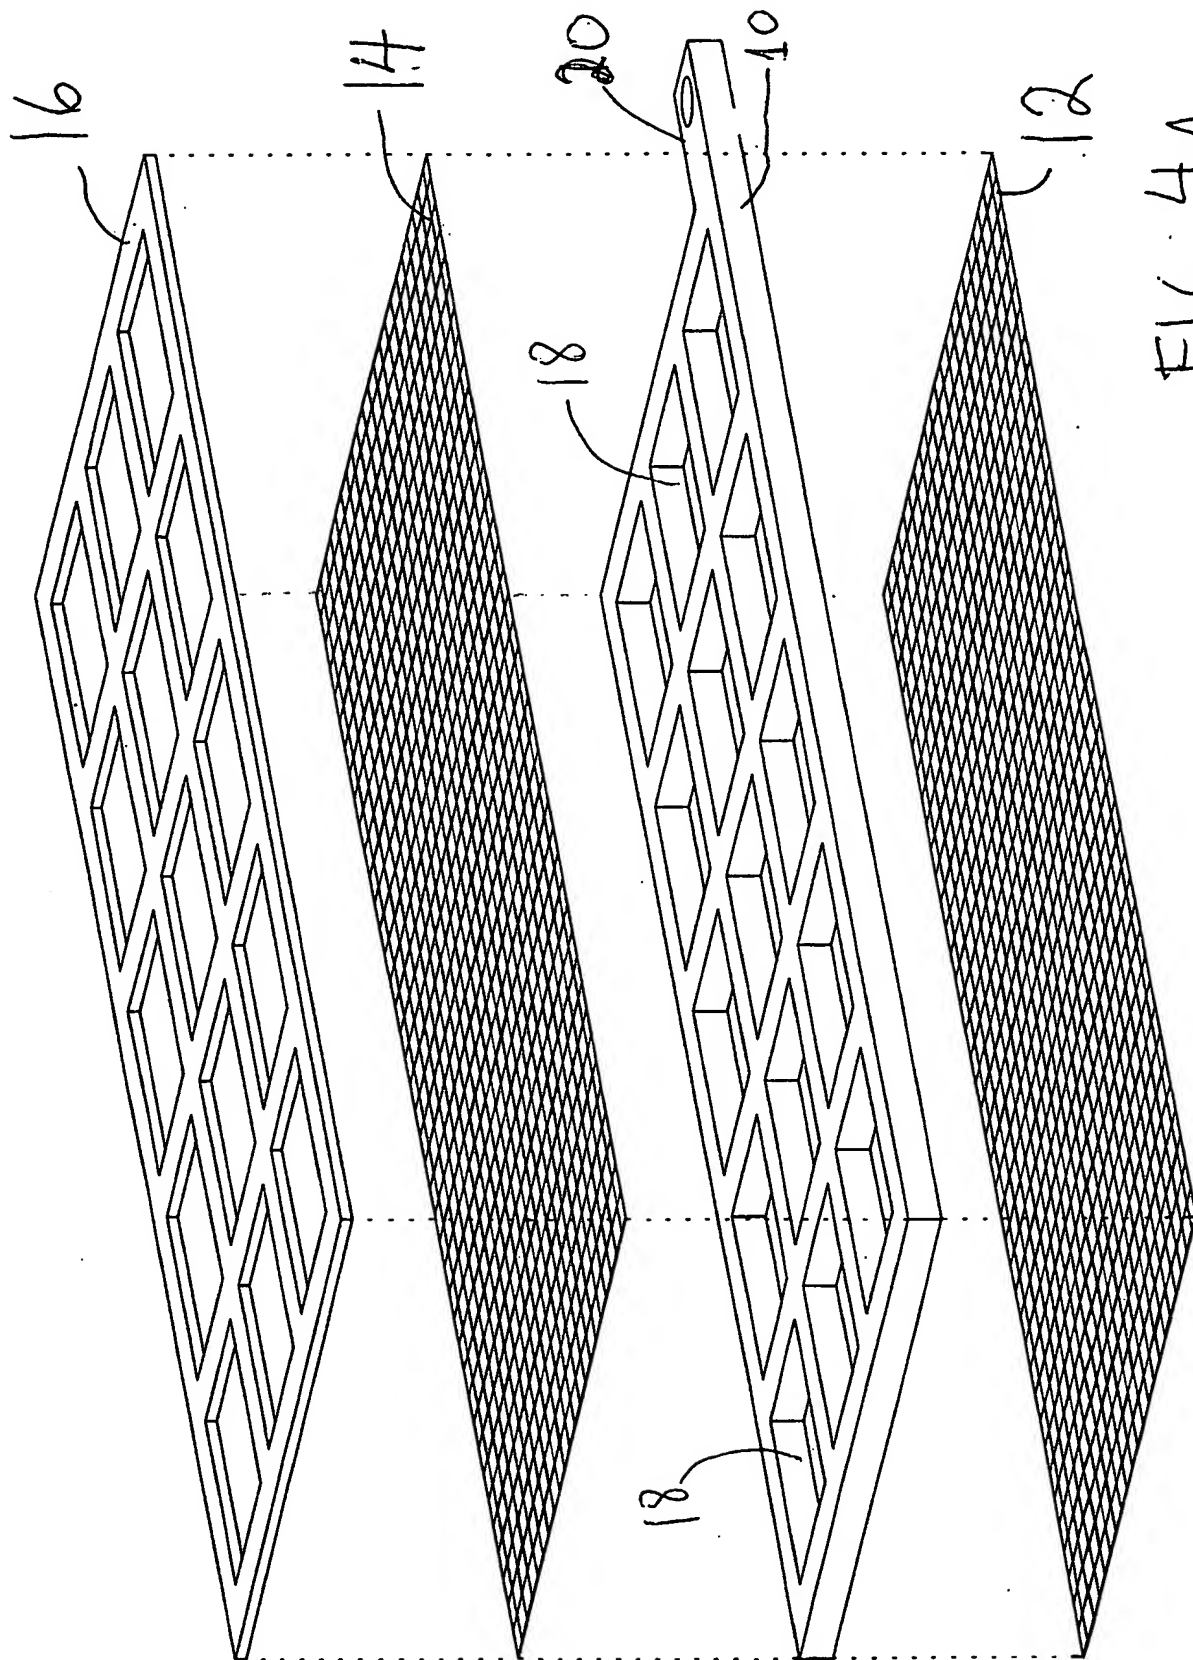


FIG. 4A

4/6


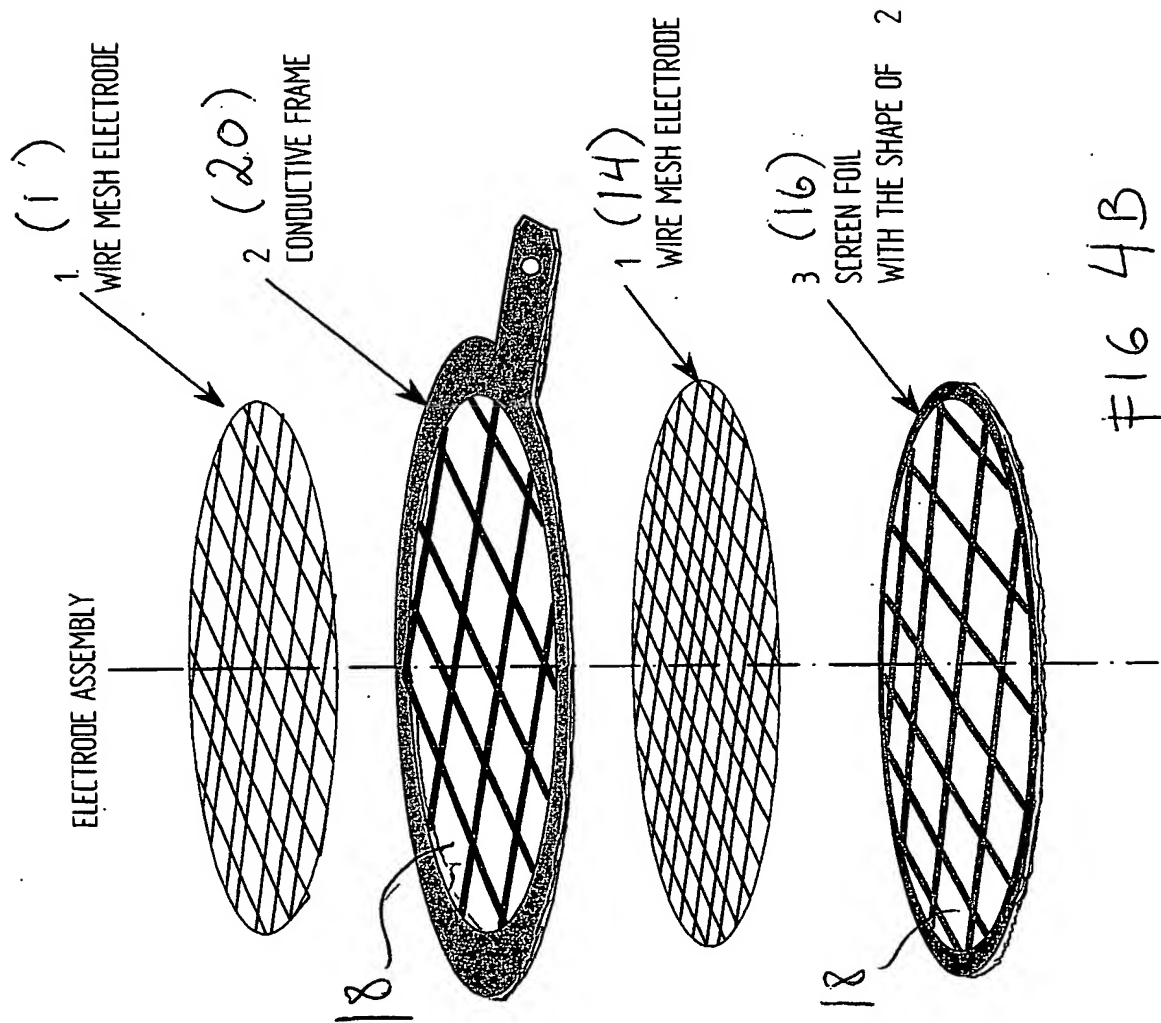


FIG 4B

EXAMPLE 5

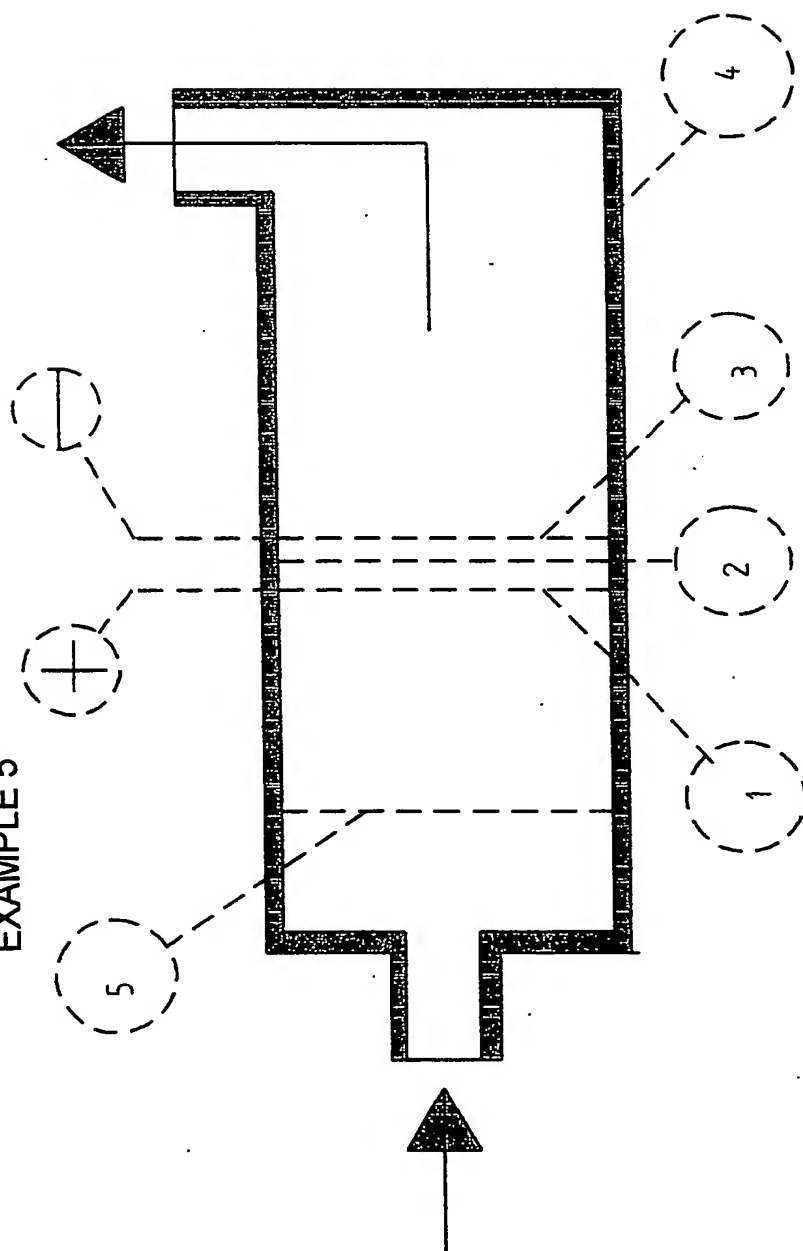


1. Anode mesh
2. Isolating oxidant-resistant separation mesh.
3. Cathode mesh of 316L
4. Cell housing
5. Perforated distribution element

FIG 5

FIG 6

## EXAMPLE 6

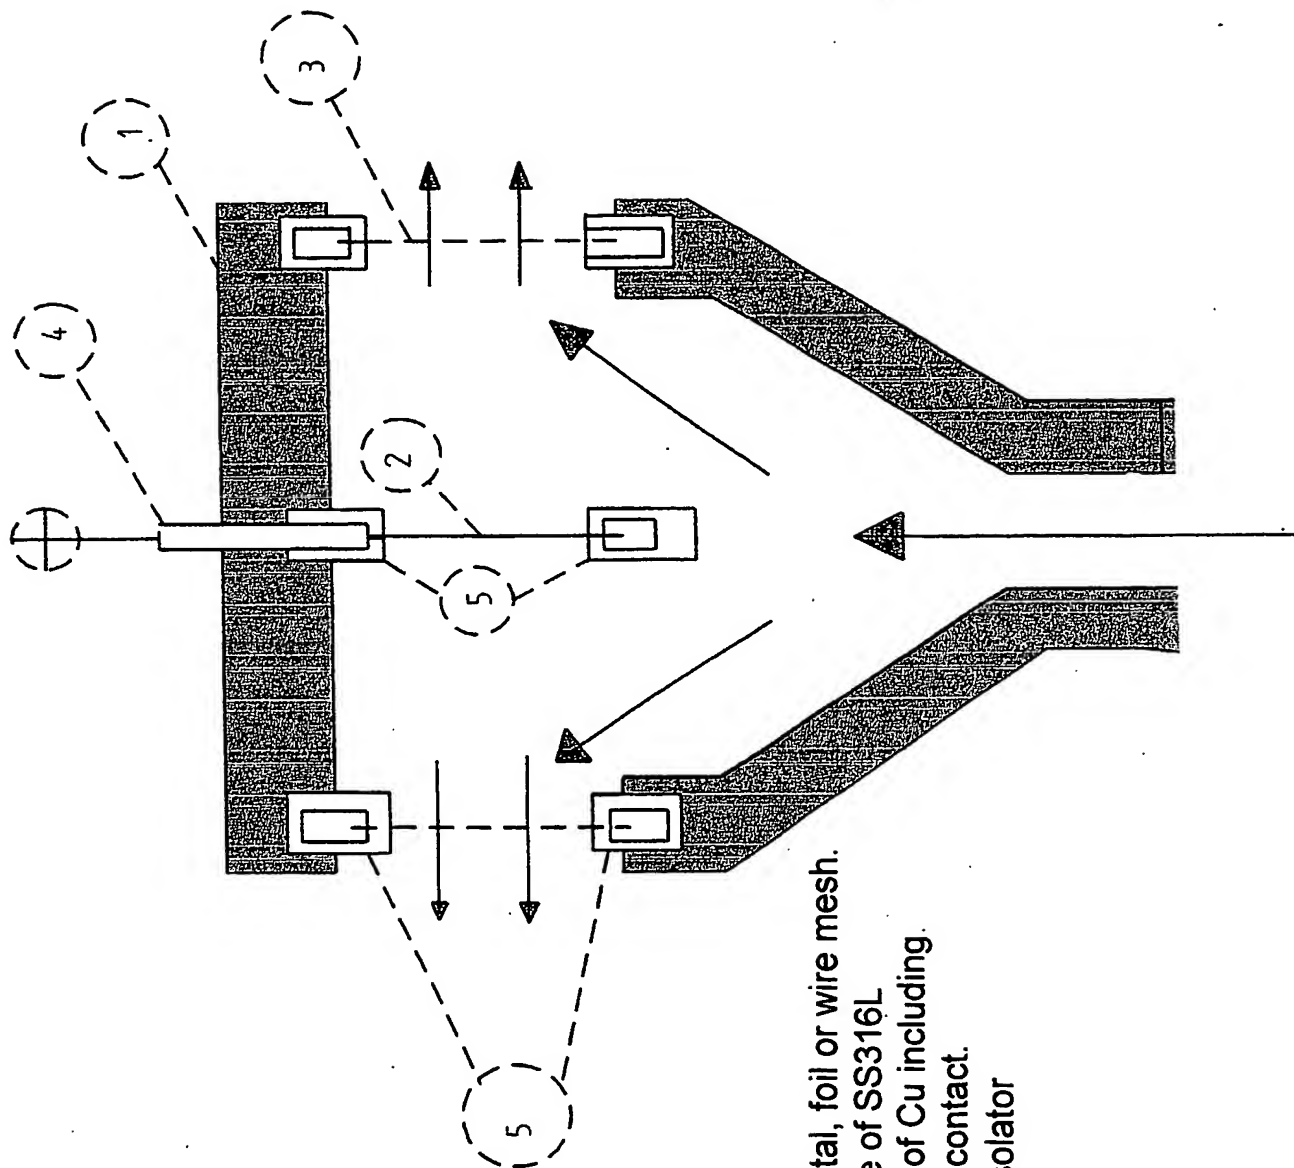

Pos No.

1. Cell housing
2. Anode of noble metal, foil or wire mesh.
3. Wire mesh cathode of SS316L
4. Isolated conductor of Cu including added noble metal contact.
5. Oxidant resistant isolator



(19) World Intellectual Property  
Organization  
International Bureau



28 FEB 2005



(43) International Publication Date  
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number  
**WO 2004/018733 A3**

(51) International Patent Classification<sup>7</sup>: **C25B 11/02**,  
11/04, C02F 1/461

(21) International Application Number:  
PCT/NO2003/000296

(22) International Filing Date: 26 August 2003 (26.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
20024054 26 August 2002 (26.08.2002) NO

(71) Applicant (for all designated States except US): **ORO**  
AS [NO/NO]; Postboks 23, Kristianborg, N-5822 Bergen  
(NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BELT, Jarle** [—/NO];  
Sagvågsveien 233, N-5410 Sagvåg (NO).

(74) Agent: **AS BERGEN PATENTKONTOR**; P.O. Box  
1998, Nordnes, N-5817 Bergen (NO).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:  
24 February 2005

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: STRUCTURE OF AN ELECTRODE FOR USE IN AN ELECTROLYTIC CELL

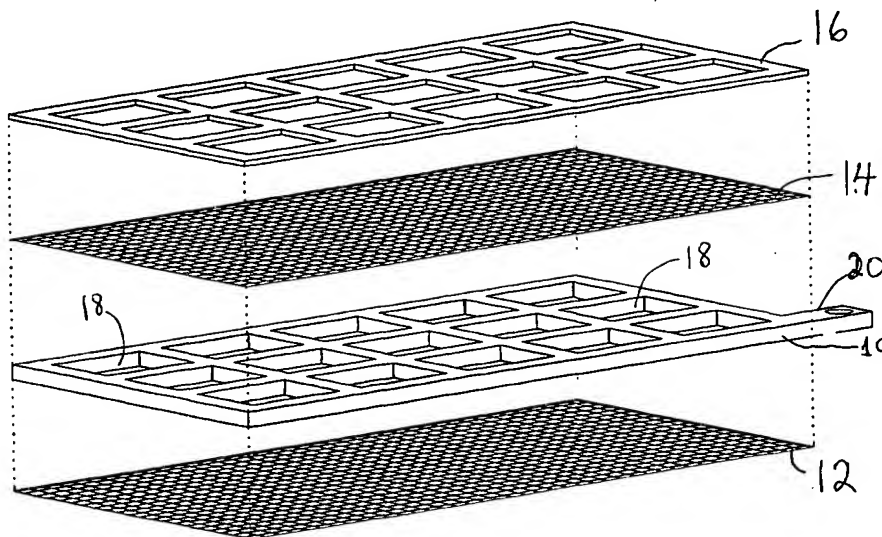

(57) Abstract: There is disclosed a structure of an electrode for use as an anode and/or a cathode in an electrolytic cell. The electrode structure is characterised by a conductive frame (10) having a number of liquid through flow openings (18) and including means (20) for connection to current a supply, in that one or both plane sides of the frame is covered with a conductive perforated foil or a wire mesh, and the wire mesh includes spacer means (18) being adapted to cover the surface structure of the frame (10). A method for preparing said electrode and use of the anode and cathode are also disclosed.

WO 2004/018733 A3

# INTERNATIONAL SEARCH REPORT

Internal Application No  
PCT/NO 03/00296

**A. CLASSIFICATION OF SUBJECT MATTER**

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 C25B11/02 C25B11/04 C02F1/461

**According to International Patent Classification (IPC) or to both national classification and IPC**

### B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C25B C02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

**EPO-Internal, WPI Data**

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<del>US 6 274 009 B1 (KRAFTON BRIAN D ET AL)</del> 14 August 2001 (2001-08-14) figure 4 abstract	<del>1-30</del>
A	EP 0 322 478 A (ABRAHAM JOSEF ;MEYER HEINZ R (DE); WILMS KAY (DE); ZIELINSKI E (DE) 5 July 1989 (1989-07-05) abstract	1-30
A	EP 1 231 298 A (SHINKO PANTEC CO LTD) 14 August 2002 (2002-08-14) abstract	1-30
A	EP 0 582 192 A (MINNESOTA MINING & MFG) 9 February 1994 (1994-02-09) abstract	1-30
	---	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

<sup>o</sup> Special categories of cited documents :

**"A" document defining the general state of the art which is not considered to be of particular relevance**

**"E" earlier document but published on or after the international filing date**

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

**"O" document referring to an oral disclosure, use, exhibition or other means**

**"P" document published prior to the international filing date but later than the priority date claimed**

**"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention**

**"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone**

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

**"&" document member of the same patent family**

Date of the actual completion of the international search

14 November 2003

Date of mailing of the international search report

03. 12. 2003

**Name and mailing address of the ISA**  
**European Patent Office, P.B. 5818 Patentlaan 2**  
**NL - 2280 HV Rijswijk**  
**Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,**  
**Fax (+31-70) 340-3016**

**Authorized officer**

ULRIKA NILSSON / ELY

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/NO 03/00296

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DATABASE WPI Section Ch, Week 199403 Derwent Publications Ltd., London, GB; Class D15, AN 1994-022106 XP002261554 &amp; JP 05 329483 A (KONICA CORP), 14 December 1993 (1993-12-14) abstract</p> <p>---</p>	1-30
A	<p>US 6 328 875 B1 (WEINBERG NORMAN L ET AL) 11 December 2001 (2001-12-11) abstract</p> <p>-----</p>	1-30

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/NO 03/00296

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6274009	B1	14-08-2001	AU 7095100 A BR 0014162 A CA 2384088 A1 EP 1230432 A1 WO 0118279 A1	10-04-2001 07-05-2002 15-03-2001 14-08-2002 15-03-2001
EP 0322478	A	05-07-1989	EP 0322478 A1	05-07-1989
EP 1231298	A	14-08-2002	JP 2001073176 A JP 2001271194 A JP 2001279480 A AU 7444700 A CA 2385847 A1 EP 1231298 A1 WO 0123644 A1 JP 3307630 B2 JP 2001164391 A	21-03-2001 02-10-2001 10-10-2001 30-04-2001 05-04-2001 14-08-2002 05-04-2001 24-07-2002 19-06-2001
EP 0582192	A	09-02-1994	US 5322597 A <del>CN 1086551 A ,B</del> CN 1236828 A ,B DE 69313382 D1 DE 69313382 T2 EP 0582192 A1 JP 3350573 B2 JP 6173059 A RU 2103415 C1 ZA 9304848 A	21-06-1994 <del>11-05-1994</del> 01-12-1999 02-10-1997 02-01-1998 09-02-1994 25-11-2002 21-06-1994 27-01-1998 06-01-1995
JP 5329483	A	14-12-1993	NONE	
US 6328875	B1	11-12-2001	US 6315886 B1 AU 3112000 A BG 105679 A BR 9915992 A CA 2355346 A1 CN 1329576 T CZ 20012002 A3 EE 200100303 A EP 1150921 A1 HU 0104664 A2 JP 2002531704 T NO 20012804 A NZ 512645 A PL 348151 A1 SK 7672001 A3 TR 200101659 T2 TW 490444 B WO 0034184 A1 KR 2000047427 A ZA 200105137 A	13-11-2001 26-06-2000 28-06-2002 04-09-2001 15-06-2000 02-01-2002 15-05-2002 15-08-2002 07-11-2001 28-03-2002 24-09-2002 07-06-2001 25-10-2002 06-05-2002 03-12-2001 22-10-2001 11-06-2002 15-06-2000 25-07-2000 23-09-2002